## **Technical specification**

Alarm and protection AC power failure alarm

High minute volume alarm

Low minute volume alarm

High airway pressure alarm

Low airway pressure alarm

Continuous pressure alarm

The maximum limited pressure

**Working condition** 

Suffocation warning

Fan error

Oxygen deficit

Gas source

Input power

Power frequency

Oscillogram P-T(Pressure-Time)

F-T(Flow-Time)

V-T(Volume-Time)

P-V Loop(Pressure-Volume Loop)

F-V Loop(Flow-Volume Loop)

P-F Loop(Pressure-Flow Loop)

Pressure Voltage

High oxygen concentration alarm Low oxygen concentration alarm

No tidal volume

Internal backup battery low voltage alarm  $\leq 11.3 \pm 0.3 \text{ V}$ 

### Ventilation mode

PRVC, APRV, DUOLEVEL, V-SIMV, P-SIMV, IPPV, A/C, PCV, PSV, SPONT/CPAP, SIGH, MANUAL

#### Ventilator parameter

Tidal volume (Vt)	20 ~ 2000 mL
Frequency (Freq)	1 min ~ 100 min
Oxygen concentration	21 % ~ 100 %
I:E	4:1~1:8
PEEP	0cmH <sub>2</sub> O ~ 40 cmH <sub>2</sub> O
Pressure triggering sensitivity (Ptr)	-20 cm $H_2O \sim 20$ cm $H_2O$ (Based on PEEP)
Flow trigger sensitivity (Ftr)	0.5 L/min ~ 30 L/min
Pressure control (PC)	5 cmH <sub>2</sub> O ~ 80 cmH <sub>2</sub> O
Pressure support (PS)	0 cmH <sub>2</sub> O ~ 80 cmH <sub>2</sub> O
SIGH	0 (off) 1/100 ~ 5/100
Apnea ventilation	OFF, 5 s ~ 60 s
Pressure limit	20 cmH <sub>2</sub> O ~ 100 cmH <sub>2</sub> O

Monitoring parameter	Mon	itoring	parameter
----------------------	-----	---------	-----------

Frequency (Freq)	0 / min ~ 100 / min
Tidal volume(Vt)	0 mL ~ 2500 mL
MV	0 L/min ~ 99 L/min
Airway pressure	0 cmH <sub>2</sub> O ~ 100 cmH <sub>2</sub> O
Dynamic lung compliance testing	1 mL/cmH <sub>2</sub> O ~ 1000 mL /cmH <sub>2</sub> O
Oxygen concentration	15 % ~ 100 %

## Packing size

Main components: L 560 \* W 560 \* H 605 mm G.W.: 40 KG, N.W.: 17 KG Air compressor: L 670\* W 700 \* H 1160 mm

G.W.: 84 KG, N.W.: 46.2 KG Other models for your reference:





Power failure or no connection

No tidal volume within 6 s

5 L/min ~ 99 L/min

1 L/min ~ 30 L/min 20 cmH<sub>2</sub>O ~ 100 cmH<sub>2</sub>O

18 % ~ 99 %

Show on screen

Show on screen

900 VA (With air compressor)

250 VA (Without air compressor)

< 12.5 kPa

280 kPa - 600 kPa

220 V ± 22 V 50 Hz ± 1 Hz

O<sub>2</sub>, Air

 $0 \text{ cmH}_2\text{O} \sim 20 \text{ cmH}_2\text{O}$ 19 % ~ 100 %

(PEEP + 1.5 cmH<sub>2</sub>O) over 16 s

The picture is for reference only. For more information, please contact sales representatives.



# **ICU Ventilator**

Cherish your life, Cherish your health!





# **ICU Ventilator**

# **Application**

The ventilator makes a good performance in operation room,ICU department and emergency treatment.It used to assist or replace the spontaneous breathing for adult pediatric and neonatal more than 2kg. 25 years experience in Market-oriented ventilator make us professional and reliable, satisfying all your needs in ventilation. Due to the flexible configuration, good quality and competitive price, S1100 has soon become the superstar of market.

## **Features**

15" TFT touch screen displays the ventilation parameters, alarm information, and oscillograms, make every operation more easily. Multiple ventilation modes, suitable for ICU, emergency department and operation room etc: ( IPPV, A/C, PCV, SIMV, PSV, SPONT/CPAP, SIGH, MANUAL)

5 oscillograms for your choice, 3 of them can be displayed on the screen at the same time.

Humidifier can heat and wet breathing gas, makes it comfortable for patient to breathe.

Rapid oxygen supply, automatically offer high flow rate oxygen within two minutes

Nebulization make medicine into small liquid and particle, easier and quickier for patient to breathe in.

High temperature resistance breathing circuit is reusable and anti-pollution.

## **Safety**

14 types of sound and visual alarm information, easier for users to do some error checking and troubleshooting.

Built-in oxygen concentration sensor, ensure stable precision of oxygen concentration.

Easy to move with four casters, easy to stop with two brakes.

Separate design of electronic circuit and gas flow rate keep safe running of ventilator.


Compact long life internal battery can provide emergency power, avoid risk of patient.

Self-check before operation, eliminate system mistake.

WE WORK LIFE - Produtos Farmacêuticos Unipessoal, Lda Rua de Campolide Edifício 5 N°351E,8°A1070-034 Lisboa Portugal

CENTRAL WORK - 29 BLVD Tower 1 & 2 - Emaar Sheikh Mohammed Bin Rashid BLVD-Downtown Dubai UAE

# Friendly Powerful Reliable

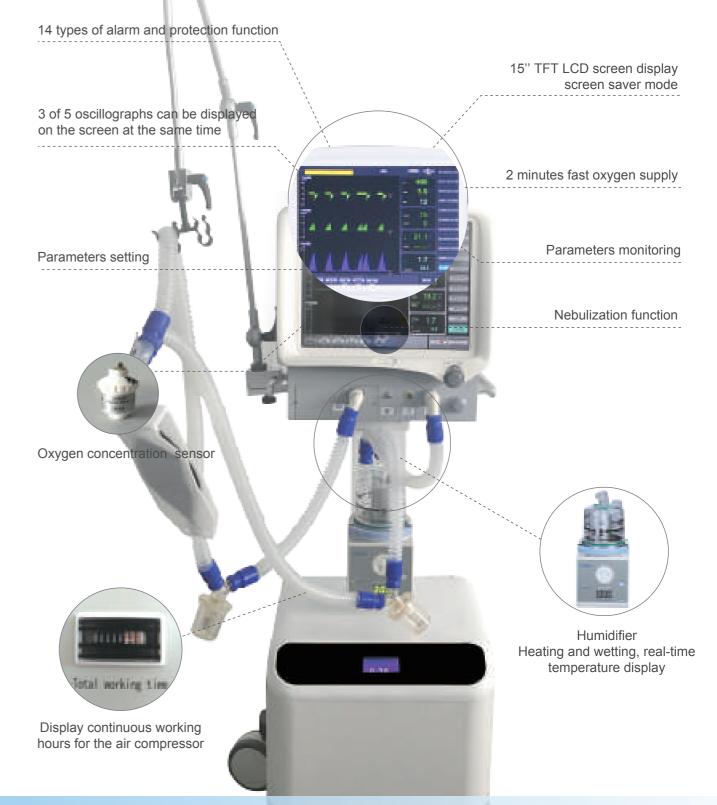

www.centralworkeau.com

+351 219833081

+351 916655075